



BANDEX

CABLE ACCESSORIES

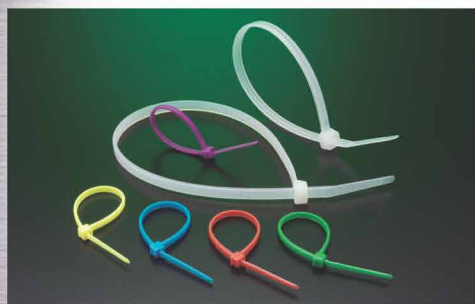

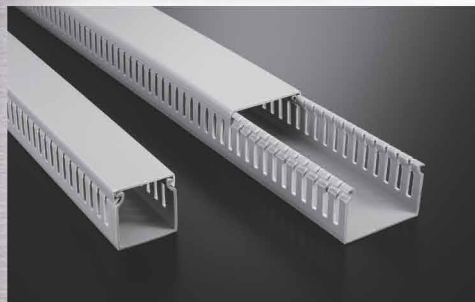

BANDEX

Cable Accessories



WIRING DUCTS 3



CABLE MARKERS 29



CABLE TIES AND
ACCESSORIES 39



INSULATING 61



CABLE CLAMPS 65



GLANDS 81



BUSHINGS 111



WIRE CONNECTORS 123



INSULATING 127



CABLE CLIPS 139




PCB SPACERS AND
SUPPORTS 149



FASTENERS 169




COPPER LUGS AND
TERMINALS 191

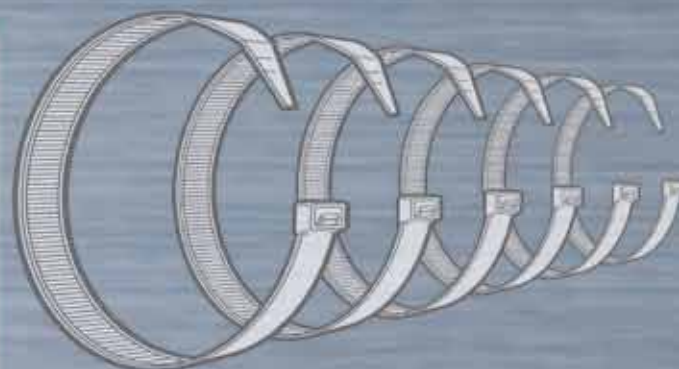

BANDEX Cable Accessories

CABLE MARKERS

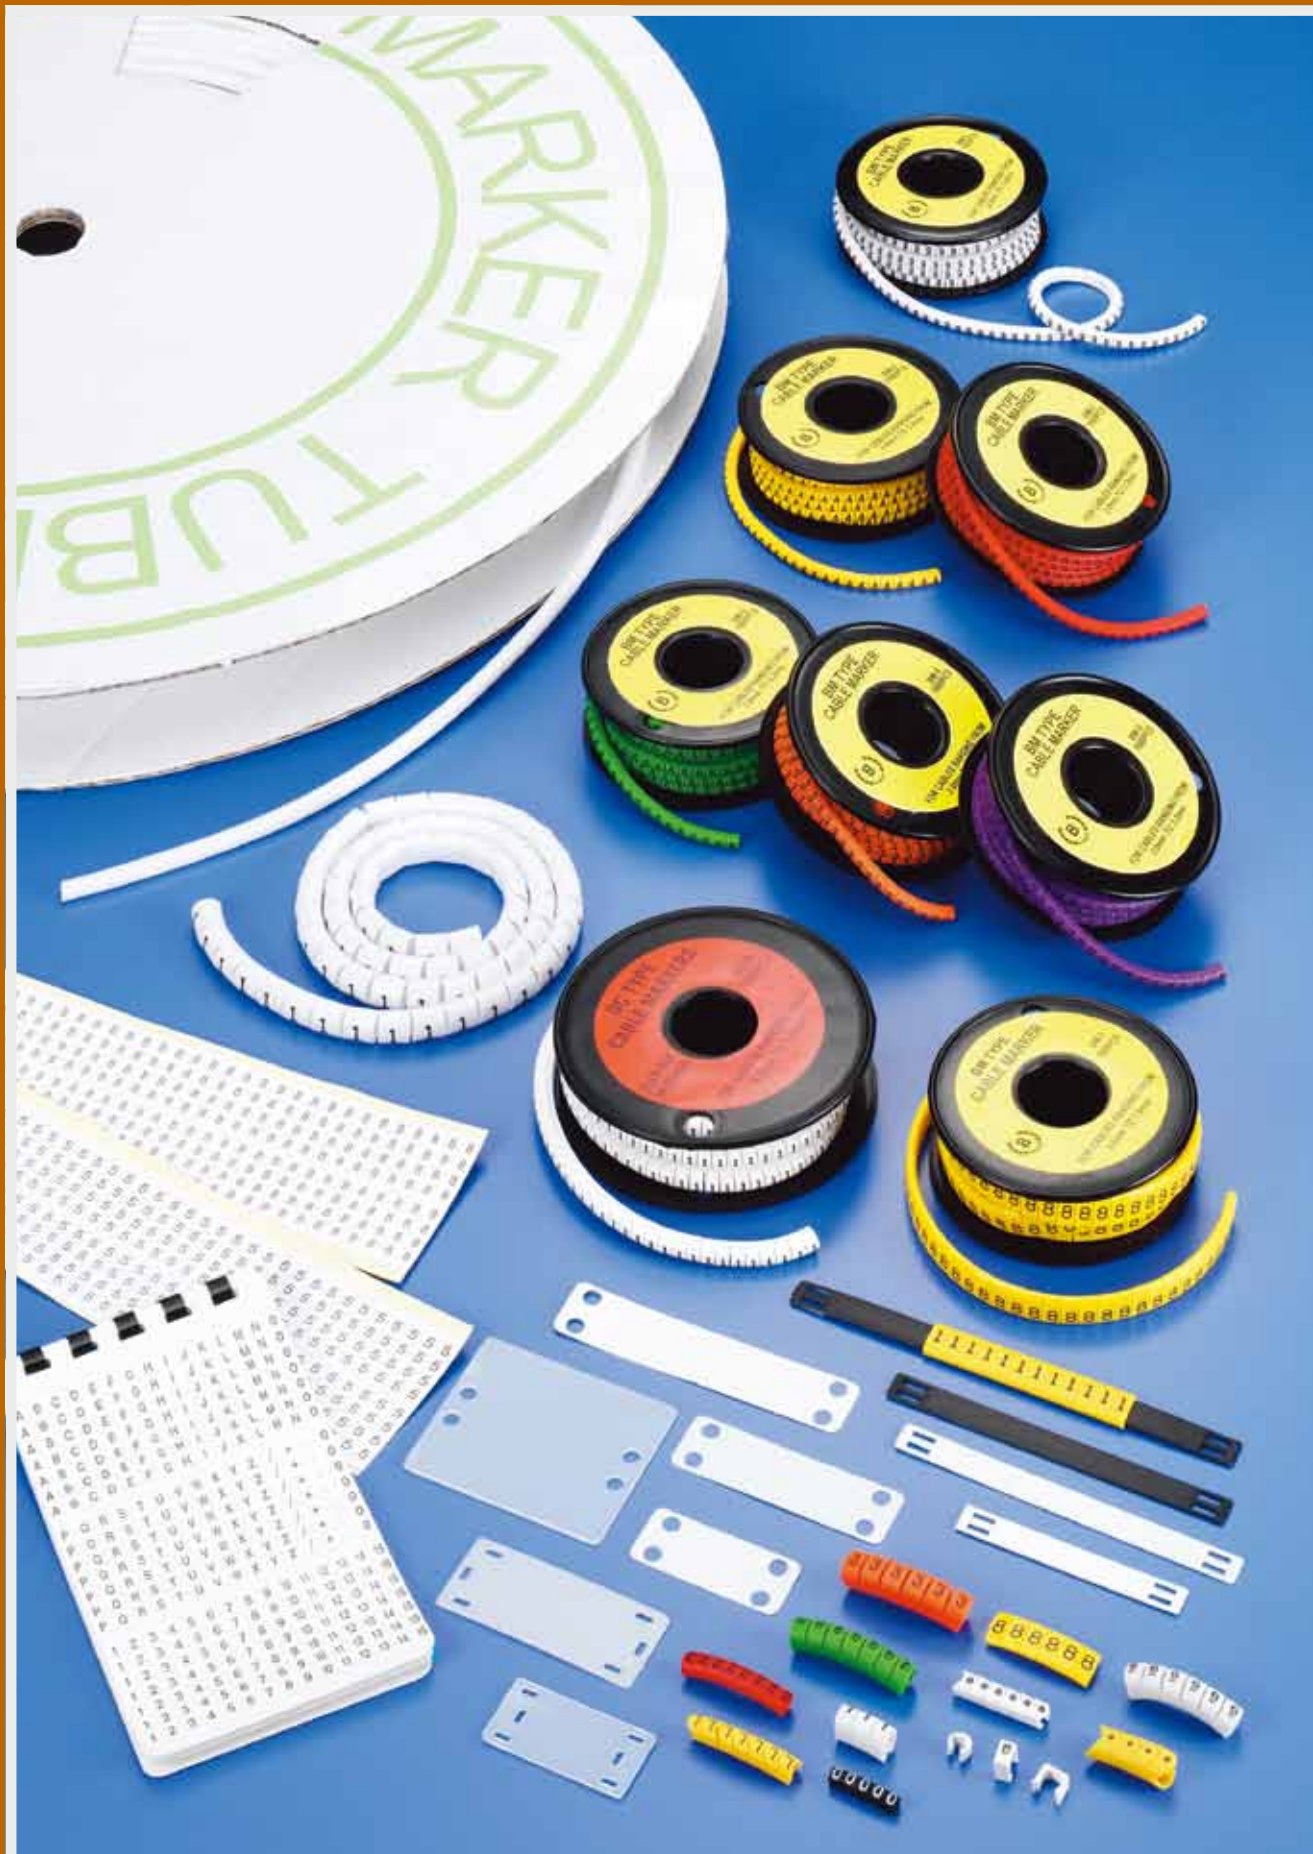

INTERLOCK MARKERS


Unit: mm

Part No.	Suitable Wre		For Cable	L	STANDARD Marking	Packing
Straight Cut	sq	AWG	Size I.D.			
BM-0	0.12~0.75	26~18	2.0~3.2	4	Solid number or letter roll for 0,1,2,3, ...9 A,B, ...Z +,-, $\frac{1}{2}$, /, blank	1000 pcs
BM-1	0.75~3.5	18~12	3.0~4.2	4		1000 pcs
BM-2	3.5~8	12~8	3.6~7.4	5		500 pcs
BM-3	8~22	8~4	5.2~10.0	5.5		250 pcs
Interlock						
EM-02	0.12~0.75	26~18	2.0~3.2	4		1000 pcs/RL
EM-1	0.75~3.5	18~12	3.0~4.2	4		1000 pcs/RL
EM-2	3.5~8	12~8	3.6~7.4	5		500 pcs/RL
EM-3	8~22	8~4	5.2~10.0	5.5		250 pcs/RL




**BM-TYPE CAN BE MADE IN 2
DIGIT MARKING OR EVEN 3
DIGITS.**

**CHEVRON CUT
(EM)**



Marker tongue spans to fit various cable diameters and retracts to hold wires firmly in position.

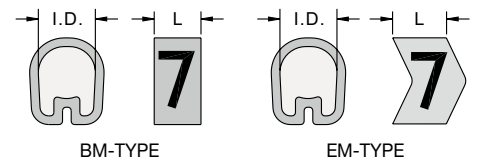


BM-TYPE

EM-TYPE


INTERLOCK MARKERS

Unit: mm

Part No.	Suitable Wre		For Cable	L	STANDARD Marking	Packing
Straight Cut	sq	AWG	Size I.D.			
ECP-02	0.2~1.25	24~18	1.3~3.0	3	Solid number or letter roll for 0,1,2,3, ...9 A,B, ...Z +,-, $\frac{1}{2}$, /, blank	1000 pcs/RL
ECP-1	0.5~5.5	20~10	2.5~5.1	3		1000 pcs/RL
ECP-2	2.0~14.0	14~6	3.6~7.6	4		250 pcs/RL
ECP-3	8.0~60.0	8~1/0	6.2~16.0	6		100 pcs/RL



Marker tongue spans to fit various cable diameters and retracts to hold wires firmly in position.



ECP-TYPE

● Material : Made of finest soft grade, strong, durable P.V.C. that will resist oil, grease, and other material erosion.

● Description :

1. BANDEX ECP type cable marker features high quality flexible interior to fit various cable diameters.
2. The markers stay attached on a roller and can be despatched easily when needed.
3. Bold print on yellow body to show your codes distinguishly. Any numbers can be composed by arranging letters and numbers in sequence to provide the necessary codes.
4. Chevron cut design to keep marking in line consistently.

COLOUR CODED CABLE MARKERS

Unit: mm

Ordering information: Add colour code to the original Size & No.

For Example : **BM1- 0 BK**

MARKER SIZE ——— NUMBER YOU NEED ——— COLOR OF MARKER

0	1	2	3	4	5	6	7	8	9
BK	BN	RD	OE	YW	GN	BE	VT	GY	WE



Marker Size	Item No. Color Coded	Marker Size	Item No. Color Coded	Marker Size	Item No. Color Coded	Marker Size	Item No. Color Coded	Marker Size	Item No. Color Coded
BM0	BM0-0BK	BM1	BM1-0BK	BM2	BM2-0BK	BM3	BM3-0BK	GM-1	GM1-0BK
	BM0-1BN		BM1-1BN		BM2-1BN		BM3-1BN		GM1-1BN
	BM0-2RD		BM1-2RD		BM2-2RD		BM3-2RD		GM1-2RD
	BM0-3OE		BM1-3OE		BM2-3OE		BM3-3OE		GM1-3OE
	BM0-4YW		BM1-4YW		BM2-4YW		BM3-4YW		GM1-4YW
	BM0-5GN		BM1-5GN		BM2-5GN		BM3-5GN		GM1-5GN
	BM0-6BE		BM1-6BE		BM2-6BE		BM3-6BE		GM1-6BE
	BM0-7VT		BM1-7VT		BM2-7VT		BM3-7VT		GM1-7VT
	BM0-8GY		BM1-8GY		BM2-8GY		BM3-8GY		GM1-8GY
	BM0-9WE		BM1-9WE		BM2-9WE		BM3-9WE		GM1-9WE

MARKER BOX

Unit: mm

Part No.	Available loaded quantity of BM Cable Marker	Material
BMB-1	13 pcs	Acrylic

- To keep and verify cable marker in rolls and improve wire application. Suitable for outside wire/application by carrying one box with various markers inside.



GM TYPE MARKERS


Unit: mm

Part No.	Cable Dia		Marker Length	Std. Markings	Packing
	sq	mm			
GM-1	2~8	3.5~7.0	5	0,1,2,3, ...9 A,B,C, ...Z, +,-, =, /, blank	500pcs

- Material : Made of finest soft grade, strong, durable PVC that will resist oil, grease and other material erosion.

- GM CABLE MARKER with its unique oval shape design provide

- 1.slip over cable directly (for small cable)
- 2.slip onto marker strip (for larger cable or cable bundles)



MARKER STRIPS

Unit: mm

Part No.	L	W	T	Available loaded quantity of GM-1 Cable Marker	Packing
MS-65	65	9	6.7	9 pcs	100pcs
MS-100	100	9	6.95	16 pcs	
MS-135	135	9	7	23 pcs	
MS-135L	135	9	13	21 pcs	
MS-170	170	9	7	30 pcs	




- Material : UL approved Nylon 66 (black) , 94V-2.
- Nylon 66 PLATE with cable tie fastening hole to accommodate marker pieces for easy identification of cable runs.

OM TYPE MARKER

Unit: mm

Part No.	Cable Dia		Wire Dia. I.D.	L	Std. Markings	Packing
	Sq	AWG				
OM-22S			1.3	10	Special specification is available upon request	100pc
OM-20S			1.5			
OM-18S			1.8			
OM-16S			1.9			
OM-0.75	0.75	18	3.0		OM-1.25 OM-2.0 0,1,2, ...100 A,B, ...Z +,-, $\frac{1}{2}$,/, blank	
OM-1.25	1.25	16	3.2			
OM-2.0	2.0	14	3.6			
OM-3.5	3.5	12	4.2			
OM-5.5	5.5	10	5.1			
OM-8	8.0	8	6.2			
OM-14	14	6	7.6		0,1,2, ...9 A,B, ...Z +,-, $\frac{1}{2}$,/, blank	
OM-22	22	4	9.4			



- Material: Soft PVC (white) , to resist oil , grease and other material erosion.
- Sleeve on design.
- Apply before wire termination.
- ◆ Special marking is available upon request

* Special Marking is available upon request.



O TYPE MARKER TUBE


Unit: mm

Part No.	Packing		Part No.	Packing	Suitable Wire		Wire Dia. I.D.
					sq	AWG	
OMR-0.75	100 M	Small Spool Pack	OMR-0.75-10M	10 M	0.75	18	3.0
OMR-1.25	100 M		OMR-1.25-10M	10 M	1.25	16	3.2
OMR-2.0	100 M		OMR-2.0-10M	10 M	2.0	14	3.6
OMR-3.5	100 M		OMR-3.5-10M	10 M	3.5	12	4.2
OMR-5.5	100 M		OMR-5.5-10M	10 M	5.5	10	5.1
OMR-8	50 M		OMR-8-10M	10 M	8.0	8	6.2




Part No.	Suitable Wire		Wire Dia. I.D.	Packing	Large Spool Pack
	sq	AWG			
OMR-0.75-500M	0.75	18	3.0	500M	
OMR-1.25-550M	1.25	16	3.2	550M	
OMR-2.0-500M	2.0	14	3.6	500M	
OMR-3.5-400M	3.5	12	4.2	400M	
OMR-5.5-200M	5.5	10	5.1	200M	

- Material : Soft durable PVC (white), resist oil, grease and other material erosion.
- Feature : Air filled with rifting design inside the tube maintain it's shape and not twist. Suitable for typing machine.



Part No.	Suitable Wire		Wire Dia. I.D.	Packing
	sq	AWG		
OMK-0.75	0.75	18	3.0	1000M/box
OMK-1.25	1.25	16	3.2	
OMK-2.0	2.0	14	3.6	

- Material : Soft durable PVC (white), resist oil, grease and other material erosion.
- Feature : Packed in box to keep tube clean for printing Good storage with 1000M per box.



O TYPE MARKER TUBE


Unit: mm

Part No.	Suitable Wire		Wire Dia. I.D.	Packing	
	sq	AWG			
OMJ-1.5	0.75	18	2.8	200M Roll	Small Spool Pack
OMJ-2.5	2.0	14	4.0		
OMJ-4.0	3.5	12	4.5		

- Material : Soft PVC (bright white)
- Available in special color request of bright red, Bright Yellow.



Part No.	Suitable Wire		Wire Dia. I.D.	Packing	
	sq	AWG			
OMT-2.5	0.5	20	2.5	200M Roll	Small Spool Pack
OMT-3.0	0.75	18	3.0		
OMT-3.2	1.25	16	3.2		
OMT-3.5	2.0	14	3.5		
OMT-4.0	2.0	14	4.0		
OMT-4.5	3.5	12	4.5	100M Roll	
OMT-5.0	5.5	10	5.0		
OMT-5.5	5.5	10	5.5		
OMT-6.2	8.0	8	6.2		
OMT-6.7			6.7		
OMT-7.1			7.1		



Part No.	Suitable Wire		Wire Dia. I.D.	Packing	
	sq	AWG			
OMT-2.5-800M	0.5	20	2.5	800M	Large Spool Pack
OMT-3.0-600M	0.75	18	3.0	600M	
OMT-3.2-650M	1.25	16	3.2	650M	
OMT-3.5-550M	2.0	14	3.5	550M	
OMT-4.0-450M	2.0	14	4.0	450M	
OMT-4.5-400M	3.5	12	4.5	400M	
OMT-5.0-350M	5.5	10	5.0	350M	
OMT-5.5-250M	5.5	10	5.5	250M	


- OMT Feature : Good for printing machine with smooth design inside the tube.

FLAT MARKER TUBE

Unit: mm

Part No.	OUT Dia D1	Cable Dia D2	Packing
FMR-3	3.5	2	100M/roll
FMR-4	4.8	3	
FMR-6	6.8	4.2	
FMR-8	8.0	5	
FMR-13	13.0	8	
FMR-18	18.0	11	50M/roll

- Material : Soft PVC, resist oil, grease and other material erosion.
- Feature : Flat design and good for printing machine.



MARKER PLATE


Unit: mm

Part No.	L	W	T	Packing
MP-1626	26	15.2	1.2	100pcs/bag
MP-2040	42.2	21.2	1.2	
MP-2560	60.8	25.2	1.2	
MP-5060	62.2	51.5	1.3	
MP-1938	38.5	19.1	0.4	
MP-1944	45.3	19.1	0.4	
MP-1950	50.5	19.1	0.4	
MP-1963	65	19.1	0.4	
MP-4463	63.8	44.8	0.4	
MP-1988	90.0	19.1	0.4	

- Material : UL approved Nylon 66
- Color : White
- Used to mark cable bundles for permanent identification.
- Secured with BANDEX cable ties extensively from CT-075 to CT-432 in variety of ways.

Part No.	L	W	T	Color	Packing
MP-16080	160.0	80.0	0.6	White, Red, Blue, Green, Yellow, Orange	100pcs/bag

- Material : UL approved Nylon 66
- Used to mark cable bundles for permanent identification.
- Secured with BANDEX cable ties extensively from CT-075-2C to CT-432-4C in variety of ways.

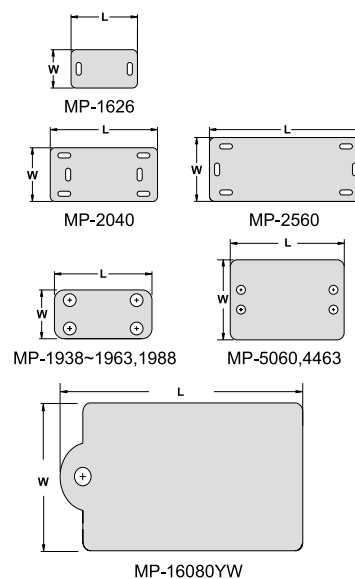


MARKER BOX

Unit: mm

Part No.	W	L	H	W1	Marking pad	Packing
MC-1	32.6	11.5	3.0	5.0	30 x 9.5	100pcs
MC-2	43.5	19.1	4.6	5.1	40 x 17	


- Material : PE NATURE
- Using Method : Cut the paper in a suitable size and mark with numbers or letters you want.
- Put the paper into marker box and tie up with cable tie.
- For tie width : less 4.8 mm

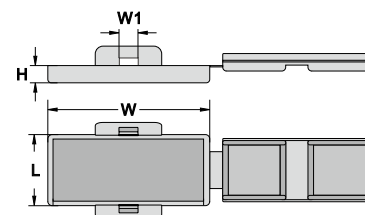




SELF ADHESIVE WIRE MARKER

Unit: mm

Part No.	L	W	Std. Markings	Packing
WM-1	25	6	Solid: 0, 1, 2, 3, ... 100 A, B, C, ... Z, +, -, $\frac{1}{2}$ Consecutive Number: 0~9	4 pcs/Leaf, 80 Leaf/Sheet, 50 Sheet/Box
		7	Consecutive Number: 1~34 35~67, 68~100, A~Z	
WM-2	25	6.5	blank	80 Leaf/Sheet, 50 Sheet/Box
WM-3	40	10		30 Leaf/Sheet, 50 Sheet/Box
WMB-1	33	5.6	(0~9) @ 1 page	10 page
WMB-2	33	5.6	(A~Z, /, +, -, 0~15) x 1 page	
WMB-3	33	5.6	(1~45) X 1 page	
WMB-4	33	5.6	(46~90) X 1 page	
※WMB-5	33	5.6	(1~45) X 4 page (46~90) X 4 page (A~Z, /, +, -, 0~15) x 2 page	

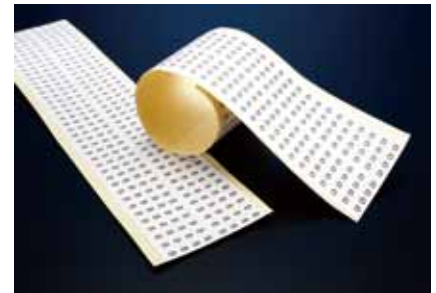

BOOK SIZE: L: 143 W: 82

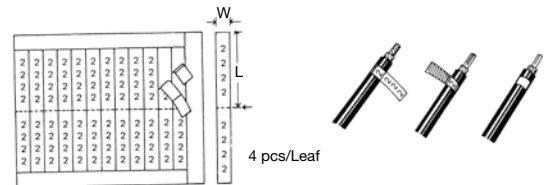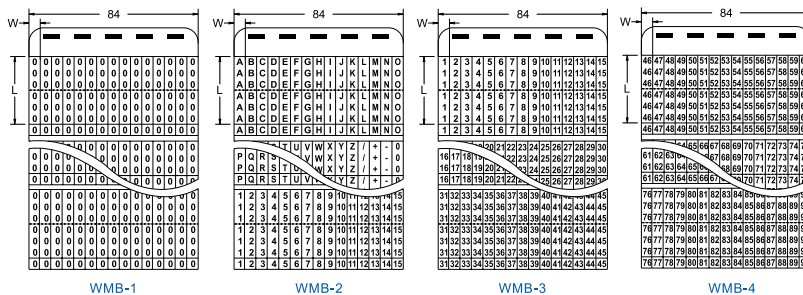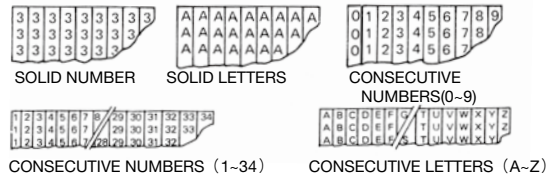


OC TYPE CABLE MARKER

Unit: mm

Part No.	Wires suitable		mm	L	Std. Markings	Packing
	Sq	mm				
OC-1	0.5~0.75	20~18	2.5~3.0	4.0	Solid or letter roll for 0, 1, 2, 3, ... 9 A, B, C, ... Z /, +, -, $\frac{1}{2}$, blank	1000 pcs / Roll
OC-2	1.25~2.0	16~14	3.2~3.6			
※OC-2L	1.25~2.0	16~14	3.2~3.6			
OC-3	3.5~5.5	12~10	4.2~5.1			
OC-4	5.5~8.0	10~8	5.1~6.2			
OC-8	14	6	7.5~8.0	6.0		300pcs / Roll



- Material: Rigid PVC
 - Standard color: White body marker in black.
- Description:
1. To be fitted after termination. The marker can be removed without breaking the terminal connection.
 2. O shape design benefit to grip the wire/cable tight.
 3. Clip on design enable it to grip wire/cable firmly in position after termination attached.
 4. Each marker will accommodate multiple wire sizes.
- ※ OC-2L has wider entrance




CM TYPE CALBE MARKER

Unit: mm

Part No.	Wires suitable		Wire Dia. I.D.	Length	Std. Markings	Packing
	Sq	mm				
CM-0.75	0.75	18	3.0	4.0	0,1,2,3, ...9 A,B,C, ...Z, +,-,≡,/, blank	100pcs/bag
CM-1.25	1.25	16	3.2			
CM-2.0	2.0	14	3.6			
CM-3.5	3.5	12	4.2			
CM-5.5	5.5	10	5.1			
CM-8	8.0	8	6.2			



- Material : Rigid P.V.C.
- Clip on design.
- Can be applied after wire termination.




MB TYPE CABLE MARKER

Unit: mm

Part No.		Suitable Wire			Suitable Range I.D.	L	Std. Markings	Packing
Yellow	White	sq	AWG	Fiber Line				
MB-0	MB-0WE	0.75	18	2.0	2.2	4.0	Solid number or letter roll for 0,1,2,3,...9 A,B,C,...Z /,+,-,≡, blank	100pcs
MB-1	MB-1WE	1.25-2.0	16-14	3.0	3.0~3.4			
MB-2	MB-2WE	3.5-5.5	12-10		4.0~5.0			
MB-3	MB-3WE	8	8		5.2~6.0	5.0		



- Material : UL approved Nylon 6
- Color : Yellow, White
- Features :
 1. One size MB cable marker is suitable for different cable dia.
 2. Fast, snap-on installation.
 3. Flexible design, not easy to transfigure.
 4. High quality hot-foil stamped.
 5. Special inside stop point design makes MB marker keep in same direction, not overturn, marker read easily.




U TYPE CABLE MARKER

Unit: mm

Part No.	Suitable wire sq		L	H	W	W1	Packing
	sq	AWG					
UM-1	1.25~2.0	16~14	12.6	4.3	4.4	3.0	100pcs

- Material: PP
- Color: Pink(PK1), Blue(BE1), Yellow(YW1), Green(GN1), Purple(VT1).
- Different colors for easy verification of wire funtion.




JM TYPE CABLE MARKER

Unit: mm

Part No.	Packing	Part No.	Packing	Suitable Wire		mm	L	Std. Markings
				mm ²	AWG			
JM-0	1000pcs (25pcsX40strips)	P-JM0	250pcs (25pcsX10strips)	0.12~0.5	26~20	1.2~2.0	2.3	0,1,2,3, ...9 A,B,C,... .Z /,+,-,=, blank
JM-1	1200pcs (30pcsX40strips)	P-JM1	300pcs (30pcsX10strips)	0.5~1.5	20~18	2.2~2.8	2.9	
JM-2	1200pcs (30pcsX40strips)	P-JM2	300pcs (30pcsX10strips)	1.5~2.5	16~14	3.0~3.6	2.8	
JM-3	800pcs (20pcsX40strips)	P-JM3	200pcs (20pcsX10strips)	4~6	12~10	4.2~5.1	2.9	

- Material : UL approved Nylon66, 94V-2
- Color : Yellow
- Yellow body with black printing

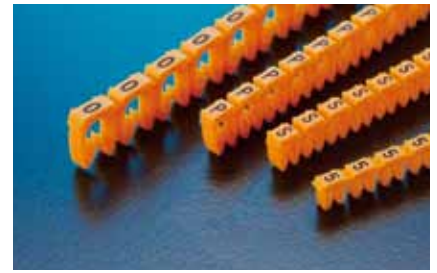


JM TYPE COLOUR CODED CABLE MARKERS

Unit: mm

Part No.	Packing	Part No.	Packing	Suitable Wire		mm	L	Std. Markings
				mm ²	AWG			
JM-0	1000pcs (25pcsX40strips)	P-JM0	250pcs (25pcsX10strips)	0.12~0.5	26~20	1.2~2.0	2.3	0,1,2,3, ...9
JM-1	1200pcs (30pcsX40strips)	P-JM1	300pcs (30pcsX10strips)	0.5~1.5	20~18	2.2~2.8	2.9	
JM-2	1200pcs (30pcsX40strips)	P-JM2	300pcs (30pcsX10strips)	1.5~2.5	16~14	3.0~3.6	2.8	
JM-3	800pcs (20pcsX40strips)	P-JM3	200pcs (20pcsX10strips)	4~6	12~10	4.2~5.1	2.9	

- Material: UL approved Nylon66, 94V-2
- Feature :
 1. More effective in marker assembly. It can be applied after completing of terminal assembly to the wire.
 2. not easy to transfigure and beautiful ,clear printing and longer lasting (not fade easily).
 3. Strip off from the cutting point easily when used. Continuously JM type cable markers is string type and each one is connected.



JM-0

JM-1,2,3

- Ordering Information: Add color code to the original Size & No.
- For Example : JM1- 0 BK


MARKER SIZE | | COLOR OF MARKER
NUMBER YOU NEED

0	1	2	3	4	5	6	7	8	9
BK	BN6	RD	OE	YW2	GN	BEC	VT	GY	WE

Marker Size	Part No. Color Coded	Marker Size	Part No. Color Coded	Marker Size	Part No. Color Coded	Marker Size	Part No. Color Coded
JM0	JM0-0BK	JM1	JM1-0BK	JM2	JM2-0BK	JM3	JM3-0BK
	JM0-1BN6		JM1-1BN6		JM2-1BN6		JM3-1BN6
	JM0-2RD		JM1-2RD		JM2-2RD		JM3-2RD
	JM0-3OE		JM1-3OE		JM2-3OE		JM3-3OE
	JM0-4YW2		JM1-4YW2		JM2-4YW2		JM3-4YW2
	JM0-5GN		JM1-5GN		JM2-5GN		JM3-5GN
	JM0-6BEC		JM1-6BEC		JM2-6BEC		JM3-6BEC
	JM0-7VT		JM1-7VT		JM2-7VT		JM3-7VT
	JM0-8GY		JM1-8GY		JM2-8GY		JM3-8GY
	JM0-9WE		JM1-9WE		JM2-9WE		JM3-9WE

BANDEX Cable Accessories

CABLE TIES AND ACCESSORIES

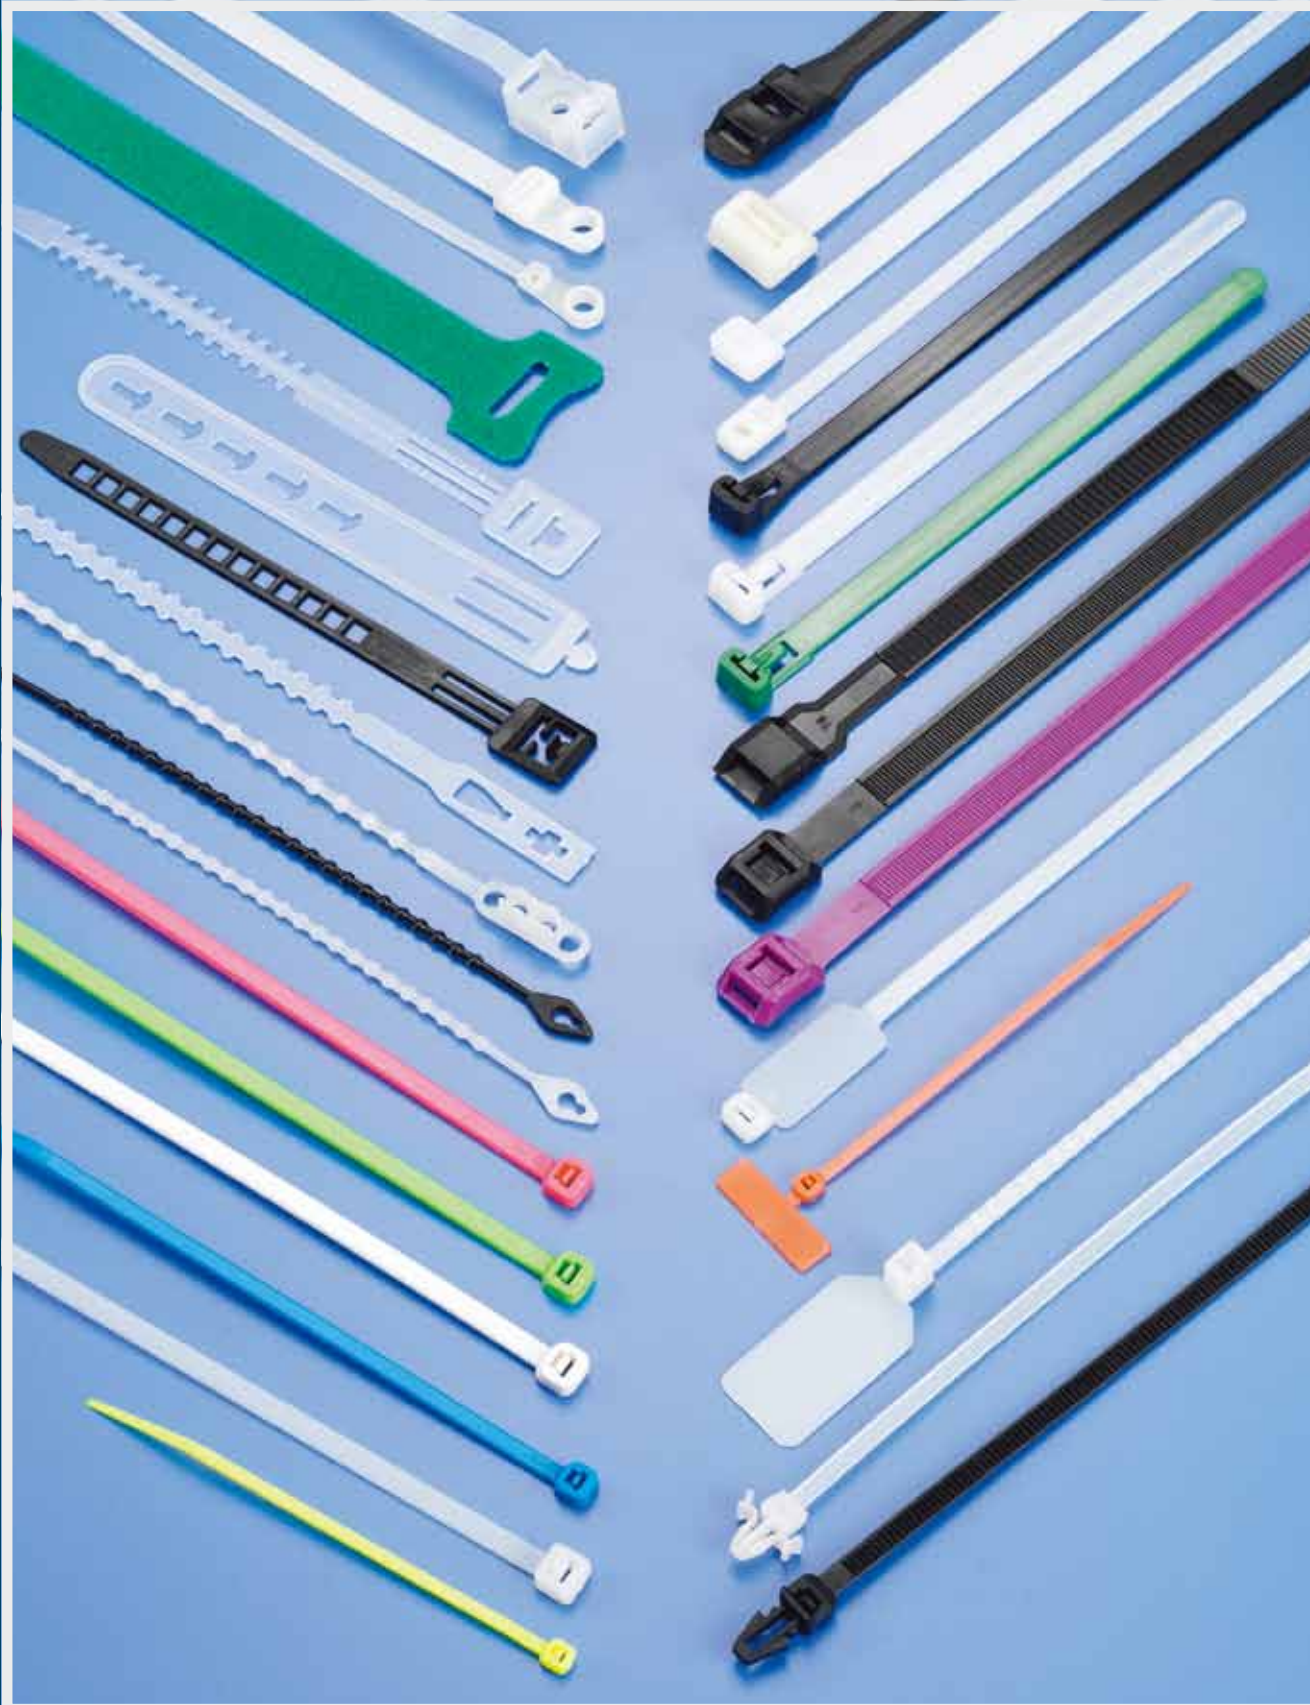

MINIATURE CABLE TIES



Unit:mm

Tensile strength 3kg/7lbs No minimum bundle diameter.

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CTT-070-2C	CTT-070-2K	71	2 13/16"	1.6	11

Tensile strength 5kg/11lbs No minimum bundle diameter.


Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CTT-100-2C		103	4"	1.95	22

Tensile strength 8kg/18lbs

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CT-060-2C	CT-060-2K	63.7	2 1/2"	2.4	11
CT-075-2C	CT-075-2K	75	3"	2.4	15
CT-080-2C	CT-080-2K	80	3 1/8"	2.5	16
CT-094-2C	CT-094-2K	96	3 3/4"	2.5	21
CT-100-2C	CT-100-2K	100	4"	2.5	22
CT-120-2C	CT-120-2K	120	4 3/4"	2.5	28
CT-140-2C	CT-140-2K	142	5 1/2"	2.5	35
CT-150-2C	CT-150-2K	155	6 1/8"	2.5	39
CT-165-2C	CT-165-2K	165	6 1/2"	2.5	43
CT-200-2C	CT-200-2K	203	8"	2.5	55
CT-250-2C	CT-250-2K	250	10"	2.5	68
CT-300-2C		300	11 7/8"	2.5	80
CT-400-2C		400	15 3/4"	2.5	116



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.



STANDARD CABLE TIES



Unit:mm


Tensile strength 18kg/40lbs

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CT-120-3C	CT-120-3K	120	4 3/4"	3.2	27
CT-140-3C	CT-140-3K	142	5 1/2"	3.2	34
CT-150-3C	CT-150-3K	150	6"	3.6	36
CT-180-3C	CT-180-3K	180	7"	3.6	46
※CTT-180-3C	CTT-180-3K	180	7"	3.6	46
CT-200-3C	CT-200-3K	203	8"	3.2	53
CT-200-3LC	CT-200-3LK	203	8"	3.6	52
CT-250-3C	CT-250-3K	250	10"	3.6	68
CT-265-3C	CT-265-3K	265	10 1/2"	3.6	73
CT-292-3C	CT-292-3K	292	11 1/2"	3.6	82
CT-330-3C		330	13"	3.6	93
CT-370-3C		368	14 1/2"	3.6	105

※ CTT-180-3C Tail



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.



STANDARD CABLE TIES



Tensile strength 22kg/50lbs

Unit:mm

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CT-120-4C	CT-120-4K	120	4 3/4"	4.8	27
CT-160-4C	CT-160-4K	160	6 1/4"	4.8	39
CT-190-4C	CT-190-4K	190	7 1/2"	4.8	49
CTT-190-4C	CTT-190-4K	190	7 1/2"	4.8	49
CT-200-4C	CT-200-4K	203	8"	4.6	52
CT-200-4LC	CT-200-4LK	203	8"	4.8	52
CT-250-4C	CT-250-4K	250	10"	4.8	68
CT-280-4C	CT-280-4K	280	11"	4.8	77
CT-300-4C		300	11 7/8"	4.8	83
CT-310-4C		310	12"	4.8	86
CT-350-4C		350	13 3/4"	4.6	98
CT-370-4C		368	14 1/2"	4.8	105
CT-385-4C		385	15 3/16"	4.8	110
CT-400-4C		400	15 3/4"	4.6	116
CT-432-4C		432	17"	4.8	125
CT-450-4C		450	17 3/4"	4.8	131
CT-500-4C		500	19 11/16"	4.8	147
CT-550-4C		550	21 11/16"	4.8	162
CT-610-4C		610	24"	4.8	181
CT-635-4C		635	25"	4.8	189
CT-914-4C		914	36"	4.8	278

※CTT-190-4C Tail




Tensile strength 34kg/75lbs

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CT-200Z-4C	CT-200Z-4K	200	8"	4.8	48
CT-280Z-4C	CT-280Z-4K	280	11"	4.8	70
CT-300Z-4C		300	11 7/8"	4.8	74
CTT-300Z-4C		300	11 7/8"	4.8	83
CT-370Z-4C		368	14 1/2"	4.8	94

※CTT-300Z-4C Tail



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.



HEAVY DUTY CABLE TIES




Tensile strength 45kg/100lbs

Unit:mm

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CT-380-6C		380	15"	6.4	108

Tensile strength 55kg/120lbs

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CT-120-7C	CT-120-7K	120	4 3/4"	7.6	22
CT-150-7C	CT-150-7K	150	6"	7.6	32
CT-200-7C	CT-200-7K	203	8"	7.6	52
CT-240-7C	CT-240-7K	240	9 7/16"	7.6	61
CT-280-7C	CT-280-7K	280	11"	7.6	74
CT-300-7C		300	11 7/8"	7.6	80
CT-340-7C		340	13 1/2"	7.6	92
CT-360-7C		360	14 3/16"	7.6	99
CT-370-7C		370	14 9/16"	7.6	101
CT-380-7C		380	15"	7.6	105
CT-610-7C		610	24"	7.6	177
CT-750-7C		750	29 1/2"	7.5	223



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.

EXTRA HEAVY DUTY CABLE TIES


Tensile strength 55kg/120lbs

Unit:mm

Part No. 100 pcs pk	L		W	Bundle dia.
	mm	inch		mm
CT-255-18C	254	10"	17.8	42
CT-380-8C	380	15"	8	105
CT-450-8C	450	17 3/4"	8	128
CT-500-8C	500	19 11/16"	8	143
CT-550-8C	550	21 11/16"	8	160



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.



Tensile strength 80kg/175lbs

Part No. 100 pcs pk	L		W	Bundle dia.
	mm	inch		mm
CT-450-9C	450	17 3/4"	9	128
CT-550-9C	550	21 11/16"	9	160
CT-610-9C	610	24"	9	177
CT-685-9C	685	27"	9	202
CT-710-9C	710	28"	9	209
CT-762-9C	762	30"	9	227
CT-812-9C	812	32"	9	243
CT-914-9C	914	36"	9	275
CT-940-9C	940	37"	9	284
CT-1168-9C	1168	46"	9	356
CT-1219-9C	1219	48"	9	372
CT-1500-9C	1500	59"	9	462

POLYPROPYLENE CABLE TIE

Tensile strength 8kg/18lbs

Unit: mm

Part No. 100 pcs pk	L		W	Bundle dia.
	mm	inch		mm
CT-150PPBK-3C	150	6"	3.6	36

Tensile strength 10kg/22lbs

CT-200PPBK-4C	200	8"	4.6	52
CT-250PPBK-4C	250	10"	4.8	68

Tensile strength 23kg/51lbs

CT-240LPPBK-7C	240	9 7/16"	7.6	61
CT-300PPBK-7C	300	11 7/8"	7.6	80
CT-380PPBK-7C	380	15"	7.6	105
CT-550PPBK-8C	550	21 11/16"	8	160



- Material: PP, good at chemical resistance from different density of base and acid.
- Color: Black (Natural is also available)
- Function: For fixing cable used at chemical industry. Increase the durability of cable tie application in chemical circumstance.



ULTRA HEAVY DUTY CABLE TIES



Tensile strength 114kg/250lbs

Unit:mm

Part No.	L		W	Bundle dia.
	mm	inch		mm
CT-230-13C	230	9"	12.7	57
CT-280-13C	280	11"	12.7	73
CT-380-13C	380	15"	12.7	105
CT-480-13C	480	18 7/8"	12.7	137
CT-550-13C	550	21 11/16"	12.7	159
CT-580-13C	580	22 7/8"	12.7	169
CT-730-13C	730	28 3/4"	12.7	216
CT-880-13C	880	34 11/16"	12.7	264
CT-1030-13C	1030	40 1/2"	12.7	312



COLOUR CABLE TIES

We are able to meet any requirement for colouring cable ties.

Hayata proudly boast a comprehensive range of all the popular colours in the most commonly used sizes.

We can also produce colour cable ties to your exact requirements in any one of our many and various styles. Minimum quantities are required for special runs, so please be sure to contact our office before ordering.

UV resistant or black cable ties are readily available with no minimum order quantity.

※ Except for standard nylon and UV resistant ties, we also have heat-stabilized CHs and 94v-0 flame-retardant ties V0.

TIE GUN

Unit: mm

Part No.	For Tie Width	Weight
TG-3	2.2~4.8	300 g
TG-5	2.2~4.8	333 g
TG-6	2.5~5.0	60 g
TG-7	2.5~5.0	275 g
TG-9	2.5~10.0	275 g
TG-10	4.8~13.0	320 g
TG-21	4.6~7.9	635 g

- Economical, pocket type
- Twist to cut surplus tie end after tightening cable. (TG-6)
- Tie gun for stainless steel tie. (TG-21)



MOUNTING HEAD TIES




Unit: mm


Part No.	L	W	A	Max. Bundle Dia	Min. Loop Tensile Strength		packing
					Lbs	kgs	
MT-100-2C	110	2.5	3.2	25	18	8	100pcs
MT-155-3C	171.5	3.7	5.0	40	40	18	
MT-170-3C	171.5	3.7	4.0	40	40	18	
MT-205-4C	219	4.2	5.0	52	50	22	
MT-300-4C	300	4.8	4.8	85	50	22	
MT-300-7C	300	7.8	6.0	80	120	55	
MT-370-4C	370	4.8	4.8	102	50	22	
MT-400-7C	400	7.9	6.0	112	120	55	



- The cable tie can be secured to panel with a single bolt.



MT-100-2C, MT-155-3C, MT-170-3C, MT-205-4C, MT-300-4C, MT-370-4C




MT-300-7C, MT-400-7C


DOUBLE HEAD CABLE TIE

Unit: mm

Part No.	L		W	D1		D2		Min. Loop Tensile Strength		packing
	mm	inch		MAX.	MIN.	MAX.	MIN.	lbs	kgs	
DCV-225	225	8 7/8"	4.8	59	2.5	52	2.0	50	22	100pcs
DCV-300	300	11 7/8"	4.8	83	2.5	76	2.0	50	22	
DCV-370	370	14 9/16"	4.8	105	2.5	98	2.0	50	22	

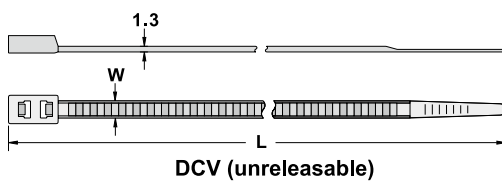


DCV (unreleasable)




- Material: UL approved Nylon 66, 94V-2
- Color: Natural

RELEASABLE DOUBLE HEAD CABLE TIE

Part No.	L		W	D1		D2		Min. Loop Tensile Strength		packing
	mm	inch		MAX.	MIN.	MAX.	MIN.	lbs	kgs	
RDCV-225	225	8 7/8"	4.8	59	2.5	52	2.0	50	22	100pcs
RDCV-300	300	11 7/8"	4.8	83	2.5	76	2.0	50	22	
RDCV-370	370	14 9/16"	4.8	105	2.5	98	2.0	50	22	

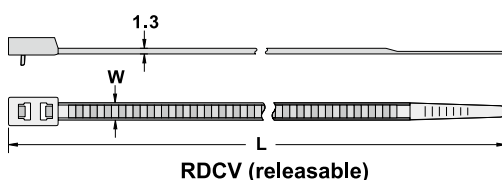


RDCV (releasable)



HANDCUFF TIE

Unit: mm

Part No.	L		L1		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch	mm	inch			Lbs	kgs	
VP-10-35NBE	900	35 1/2"	450	17 3/4"	8.0	127	120	55	10PCS

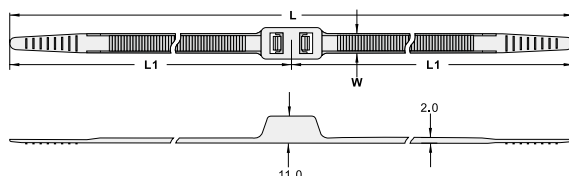


- Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation, not apt to age.
- Color: Blue
- Function: By means of double lock, bind wires or restrict action immediately.
- Feature:
 1. Bundling two things with single tie.
 2. Lock with extra height is hard to break.
 3. Smooth is inside so it won't hurt hands or wires.
 4. Environmental friendly, wear and impact resistant, easy to carry.
- ※ Special color, length available on request.

BEAD TIE

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
TV-130K	143	5 3/8"	1.8	35	11	5	1000PCS




- Material: UL approved Nylon 66, 94V-2
- Color: Natural

RELEASABLE MARKER TIE

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		Marking pad A X B	packing
	mm	inch			Lbs	kgs		
MHVC-100	114	4 1/2"	3.6	24	18	8	13 x19	100PCS
MHVC-200	215	8 1/2"	3.6	50	18	8	13 x19	

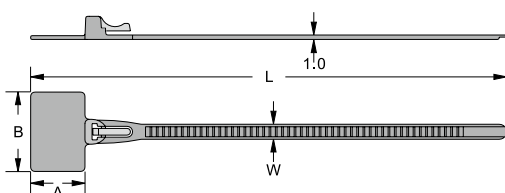

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Tie and identify bundles of cable in one operation. Flat areas may be imprinted or written on with a Marking Pen.
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

MARKER TIES





Unit: mm

Part No.	L		W	Max. Bundle Dia.	Min. LoopTensile Strength		Marking pad mm A x B	packing
	mm	inch			Lbs	kgs		
MV-100-2C	100	4"	2.5	23	18	8	8 X 25	100pcs
MV-100L-2C	130	5 1/8"	2.5	22	18	8	28X 20	
MV-110-2C	110	4 3/8"	2.5	20	18	8	8 X 25	
MV-200-4C	200	8"	4.6	50	50	22	28 X 13	
MV-200-2C	200	8"	2.5	50	18	8	15 X 30	
MV-200S-2C	200	8"	2.5	50	18	8	8 X 25	
MV-270-4C	270	11"	4.6	75	50	22	28 X 13	
MV-300-4C	300	11 7/8"	4.8	82	50	22	54.5 X 13	
MV-370-4C	370	14 9/16"	4.8	105	50	22	54.5 X 13	



● Material: UL approved Nylon 66, 94V-2

● Tie and identify bundles of cable in one operation. Flat areas may be imprinted or written on with a Marking Pen.

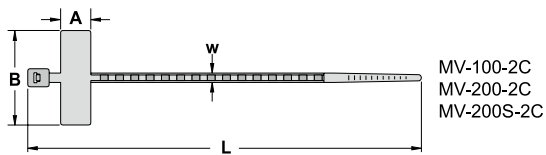

SECURITY TIE

Unit: mm


Part No.	L		W	Max. Bundle Dia.	Marking pad mm A x B	packing
	mm	inch				
SCT-110	111	4 3/8"	2.6	20	8 X 27.6	100pcs
SCT-250	248.5	10"	3.5	50	36 X 19	
SCT-400	400	15 3/4"	4.8	102	36.5 X 19	



● Material: UL approved Nylon 66, 94V-2

● Feature: for the purpose of identification for security service logistics, transportation and courier.

The size of marker plate could be made or carved LOGO upon customer's request.

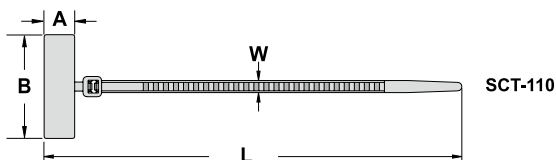


MARKER TIE

Unit: mm

Part No.	L		W	Max.Bundle Dia.	Marking pad mm A x B	packing
	mm	inch				
PMT-150	160	6 1/4"	5	25	9.2 X 30	100pcs

- Material : PE
- Color: Natural
- Put the marking paper chip into marker box.

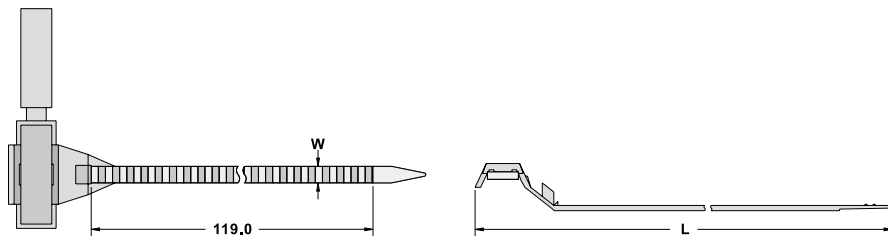


RELEASABLE CABLE TIES



Unit: mm

Part No.	L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
RV-125B-7C	125	4 15/16"	7.6	30	50	22	100pcs
RV-150B-7C	150	6"	7.6	35	50	22	
RV-200B-7C	203	8"	7.6	50	50	22	
RV-250B-7C	250	10"	7.6	65	50	22	
RV-300B-7C	300	11 7/8"	7.6	80	50	22	
RV-500B-8C	500	19 7/8"	8.5	145	75	34	

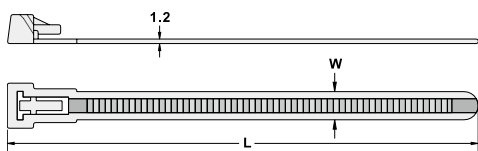

- Material: UL approved Nylon 66, 94V-2
- Color: Black , Natural
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

RELEASABLE CABLE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
RV-125B-4C	125	4 15/16"	4.5	25	50	22	100pcs
RV-150B-4C	150	6"	4.5	35	50	22	
RV-200B-4C	200	8"	4.5	50	50	22	
RV-250B-4C	250	10"	4.5	65	50	22	
RV-300B-4C	300	11 7/8"	4.5	80	50	22	




- Material: UL approved Nylon 66, 94V-2
- Color: Black , Natural
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

RELEASABLE CABLE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
RVC-125B-7C	125	4 15/16"	7.6	30	50	22	100pcs
RVC-150B-7C	150	6"	7.6	41	50	22	
RVC-200B-7C	203	8"	7.6	58	50	22	
RVC-250B-7C	250	10"	7.6	73	50	22	
RVC-300B-7C	300	11 7/8"	7.6	89	50	22	
RVC-370B-7C	370	14 5/8"	7.6	108	50	22	

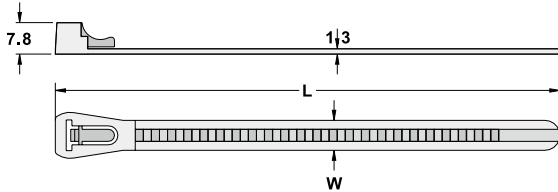


- Material: UL approved Nylon 66, 94V-2
- Color: Black , Natural
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

RELEASABLE CABLE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
RT-100-2C	102	4"	3.6	25	40	18	100pcs
RT-150-4C	150	6"	4.6	39	50	22	
RT-200-4C	200	8"	4.6	55	50	22	
RT-250-4C	250	10"	4.8	74	50	22	
RT-300-4C	300	11 7/8"	4.8	88	50	22	
RT-370-4C	370	14 9/16"	4.8	102	50	22	
RT-914-9C	914	36"	9	275	175	80	
RT-230-12C	232.5	8 15/16"	12.8	60	250	114	
RT-290-12C	292.5	11 1/2"	12.8	79	250	114	
RT-405-12C	407.5	16"	12.8	116	250	114	
RT-480-12C	482.5	18 7/8"	12.8	140	250	114	
RT-580-12C	576.6	22 7/8"	12.8	172	250	114	

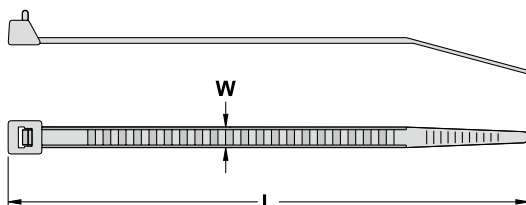


- Material: UL approved Nylon 66, 94V-2
- Finger catch design to release cable tie locking. Good for temporary fastening purpose.

RELEASABLE LASHING CABLE TIE

Unit: mm

Part No.	L		W mm	Max. Bundle Dia.	Min. LoopTensile Strength		packing
	mm	inch			Lbs	kgs	
HRCV-240XL	240	9 7/16"	12.8	60	250	114	100pcs
HRCV-300XL	300	11 7/8"	12.8	79	250	114	
HRCV-415XL	415	16 5/16"	12.8	116	250	114	
HRCV-490XL	490	19 5/16"	12.8	140	250	114	
HRCV-590XL	590	23 1/4"	12.8	171	250	114	

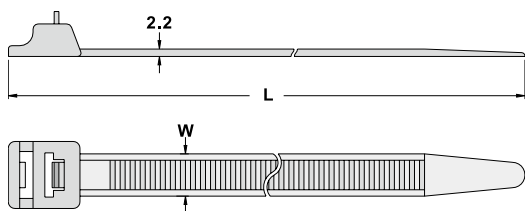


- Material: UL approved Nylon 66, 94V-2
- Finger catch design to release cable tie locking. Good for temporary fastening purpose.

PUSH MOUNT TIE

Unit: mm

Part No.	L		W mm	Max.Bundle Dia. (mm)	Min. LoopTensile Strength		packing
	mm	inch			Lbs	kgs	
PHV-150	152.5	6	7.9	37	30	13	100pcs




- Material: UL approved Nylon 66, 94V-2
- Releasable.

SADDLE MOUNTING TIE

Unit: mm

Part No.	L		W mm	packing
	mm	inch		
PMB-145	144.6	5 11/16"	7.1	100pcs
PMB-240	238.2	9 3/8"	7.1	

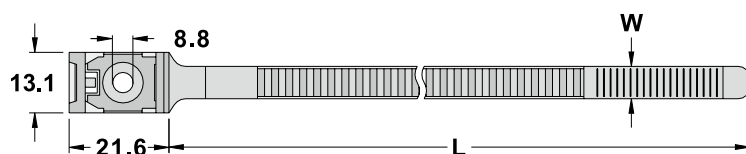


- Material: UL approved Nylon 66, 94V-2
- Color: Natural,Grey
Standard color is natural, other special colors are available upon request. Standard color is natural, other special colors are available upon request.
- With using model no. CWP-38 (Wall Plug) together, and fix things on the wall easily.



DOUBLE LOCKING CABLE TIES

Unit: mm

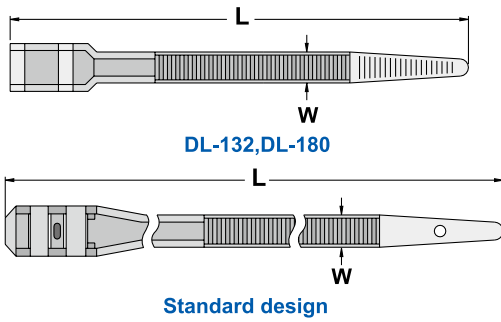

NYLON66

Part No.		L		W	Max.Bundle Dia.	Min. oopTensile Strength		packing
Natural	Black	mm	inch			lbs	kg	
DL-132	DL-132BK	132	5 1/8"	9.0	25	79	36	100pcs
DL-180	DL-180BK	180	7"	9.0	40	79	36	
DL-235	DL-235BK	235	9 1/4"	9.0	53	120	55	
DL-265	DL-265BK	265	10 1/2"	9.0	78	120	55	
DL-300	DL-300BK	300	11 7/8"	9.0	88	120	55	
DL-360	DL-360BK	360	14 1/4"	9.0	100	120	55	
DL-510	DL-510BK	510	20"	9.0	150	120	55	
DL-610	DL-610BK	610	24"	9.0	180	120	55	
DL-760	DL-760BK	760	30"	9.0	230	120	55	

- Material : UL approved Nylon 66 , 94V-2
- Color: Natural , Black

NYLON12

Part No.	L		W	Max.Bundle Dia.	Min. oopTensile Strength		packing
Black	mm	inch			lbs	kg	
DL-132N12BK	132	5 1/8"	9.0	25	55	25	100pcs
DL-180N12BK	180	7"	9.0	40	55	25	
DL-235N12BK	235	9 1/4"	9.0	53	112	51	
DL-265N12BK	265	10 1/2"	9.0	78	112	51	
DL-300N12BK	300	11 7/8"	9.0	88	112	51	
DL-360N12BK	360	14 1/4"	9.0	100	112	51	
DL-510N12BK	510	20"	9.0	150	112	51	
DL-610N12BK	610	24"	9.0	180	112	51	
DL-760N12BK	760	30"	9.0	230	112	51	

- Material : UL approved Nylon12 , 94HB.
- Color: Natural , Black


DOUBLE LOCKING CABLE TIE

Unit: mm


Part No.		L		W	Max. Bundle Dia.	Min. LoopTensile Strength		packing
Black	Natural	mm	inch			Lbs	kgs	
DK-132SBK		132	5 1/8"	6	25	50	22	100pcs
DK-180SBK		180	7"	6	40	50	22	
DK-180BK		180	7"	9	40	80	36	
DK-200BK	DK-200	201	8"	9	47	80	36	
DK-265BK		265	10 1/2"	9	64	120	55	
DK-290BK	DK-290	292	11 1/2"	9	72	120	55	
DK-360BK		360	14 1/4"	9	95	120	55	
DK-380BK	DK-380	382	15"	9	100	120	55	
DK-510BK		510	20"	9	142	120	55	
DK-610BK	DK-610	610	24"	9	174	120	55	
DK-760BK		760	30"	9	214	120	55	



- Material: UL approved Nylon 66, 94V-2



DK-132S,DK-180,DK-180S,DK-200



DK-265,DK-290,DK-360,DK-380,DK-510,DK-610,DK-760


IN-LINE CABLE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia.	packing
	mm	inch			
FCT-255	255	10"	9.0	74	100pcs
FCT-391	391	15 1/2"	9.0	117	




- Material: UL approved Nylon 66, 94V-2.
- Color : Natural and Black, other colors are available upon request.
- Feature: Flat headed low profile design to be used with playground equipment to avoid harming playing children.



IN-LINE CABLE TIES

Unit: mm

Part No.	L		W	Max.Bundle Dia.	packing
	mm	inch			
RRCV-100	103	4"	2.5	23	100pcs
RRCV-200D	203	8"	4.8	52	

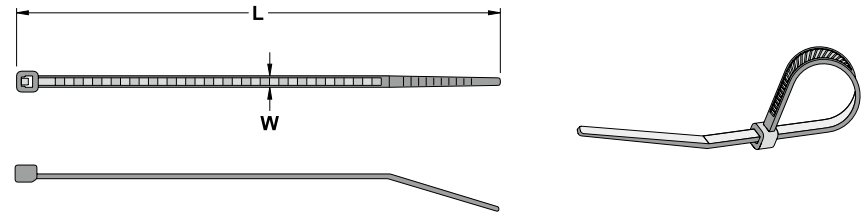

- Material: UL approved Nylon 66, 94V-2.
- Feature : Reverse-insert design with pawl outside to eliminate the damage of object.


BAED TYPE TIES

Unit: mm


Part No.	L		W	Max. Bundle Dia	packing
	mm	inch			
BT-100	103	4"	2.5	25	100pcs
BT-120	120	4 3/4"	2.4	30	
BT-150	150	6"	2.9	39	
BT-180	180	7"	2.9	49	
BT-230	226	8 15/16"	3.8	63	
BT-280	273	11"	3.0	75	



BT-100,120



BT-150,180,280



BT-230



- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.


DOUBLE HEAD KNOT TIE

Unit: mm


Part No.				L		W	Max. Bundle Dia	packing
NYLON 66		PE		mm	inch			
Natural	Black	Natural	Black					
KTV-145	KTV-145BK	KTV-145E	KTV-145EBK	145	5 3/4"	2	35	100pcs
KTV-150	KTV-150BK	KTV-150E	KTV-150EBK	150	6"	3.6	38	
KTV-170	KTV-170BK	KTV-170E	KTV-170EBK	167	6 9/16"	3.9	41	
KTV-180	KTV-180BK	KTV-180E	KTV-180EBK	180	7"	3.6	46	
KTV-230	KTV-230BK	KTV-230E	KTV-230EBK	230	8 15/16"	3.6	62	




- Material : Nylon 66 、 PE
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.



KTV-145



KTV-150, KTV-180, KTV-230




KTV-170

KNOT TIE

Unit: mm

Part No.		L		W	Max. Bundle Dia	packing
Red	Natural	mm	inch			
STV-130RD7	STV-130	130	5 1/8"	3	35	100pcs

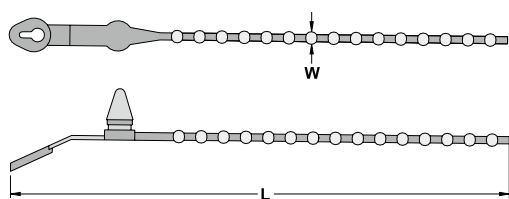

- Material: UL approved Nylon 66, 94V-2
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.


WIRE COLLECT TIE

Unit: mm

Part No.	L		W	Max.Bundle Dia.	packing
	mm	inch			
PV-130-15C	130	5 1/8"	15	35	100pcs
PV-140-9C	142	5 1/2"	9	38	
PV-160-9C	160	6 1/4"	8.5	45	
PV-230-5C	234	9 1/16"	5.5	50	
PV-350BK-7C	350	13 3/4"	7.0	100	




- Material: Polyethylene PE.
- Color: Natural. For Black, Please add" BK" to item No.
- Application: Wrap electrical cords for shipping and packaging.
- Using Method: First, Put the wire into A (see the diagram) then roll up the wire and end it by collect tie.

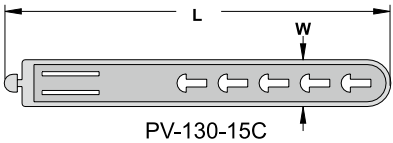

PV-130-15C



PV-160-9C



PV-140-9C



PV-230-5C
PV-350-7C


WIRE COLLECT TIE

Unit: mm

Part No.		L		W	Max. Bundle Dia	Min. LoopTensile Strength		packing
Natural	Black	mm	inch			Lbs	kgs	
WCT-165	WCT-165BK	165	6 1/2"	7	44	50	22	100pcs



- Material: UL approved Nylon 66, 94V-2

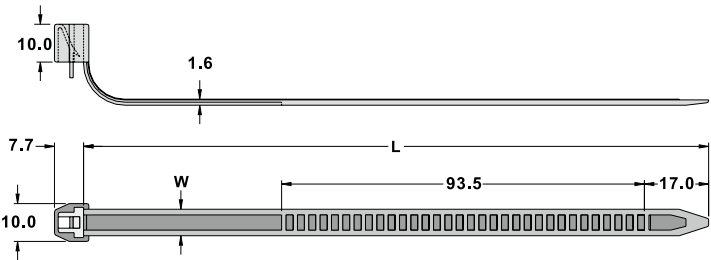

PUSH MOUNT TIE





Unit: mm

Part No.	L		W	Max. Bundle Dia. (mm)	Mounting hole	Chassis	Min. Loop Tensile Strength		packing
	mm	inch					Lbs	kgs	
PCVS-130	132	5 1/8"	4.8	30	4.8	3	50	22	100pcs
PCV-155	168	6 1/8"	3.8	40	4.8	3	40	18	
PCVS-200	203	8"	4.8	50	4.8	3	50	22	
PCV-200	203	8"	4.8	50	6.4	3	50	22	
PEV-170BK	170	6 11/16"	5.3	40	6.8	12	26	12	
PFVS-130	131	5 1/8"	3.7	30	4.8	2.4	40	18	
PFVS-155	157.5	6 1/8"	3.7	38	4.8	2.4	40	18	
PFVS-200	207	8"	3.7	50	4.8	2.4	40	18	
PGV-100	101	4 1/8"	3.4	25	4.8	2.5	40	18	
PGV-130	135	5 5/16"	3.4	33	4.8	2.5	40	18	
PSV-130	132	5 1/8"	4.8	30	6.4	3.3	50	22	
PSV-200	202	8"	4.8	50	6.4	3.3	50	22	
PUV-170	168.6	6 5/8"	5.4	38	6.8	1.6	50	22	
PWVS-100	112	4 3/8"	2.5	25	4.6	2.6	18	8	
PWVS-130	133	5 1/8"	4.8	30	4.6	4.5	50	22	
PWVS-155	157	6 1/8"	3.5	36	4.6	2.6	40	18	
PWV-130	132	5 1/8"	4.8	30	6.2	2.8	50	22	
PWV-170	170	6 11/16"	4.6	40	6	3	50	22	
PWV-200	201	8"	4.8	50	6.2	2.8	50	22	
PRVS-130HSBK	134.5	5 1/4"	4.8	30	8.2	5	50	22	



- Material: UL approved Nylon 66, 94V-2
- Press the tie into a pre-drilled hole and bind the cord by securing the tie.
- ※ PRVS-130HSBK : UL approved heat stabilized Nylon 66, 94V-2 black

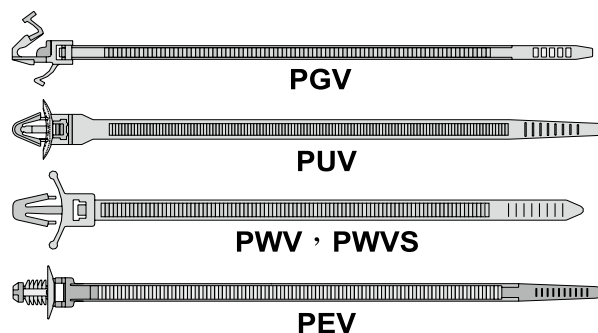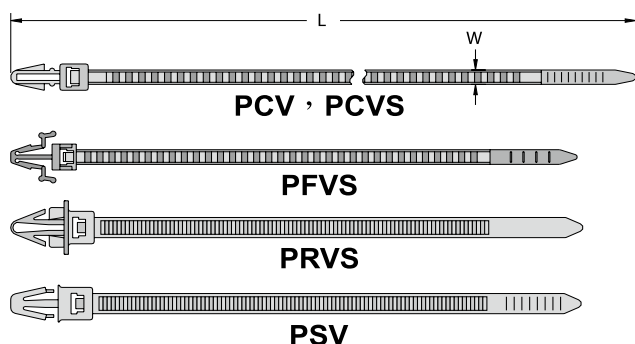

RELEASABLE PUSH MOUNT TIE

Unit: mm

Part No.	L		W	Max. Bundle Dia	Mounting hole diameter	Chassis thickness	Min Loop Tensile Strength		packing
	mm	inch					Lbs	kgs	
PDV-170BK	169	6 5/8"	5.0	36	7.0	15	40	18	100pcs




- Material: UL approved Nylon 66, 94V-2

CABLE TRAY FIXING TIE

Unit: mm

Part No.		L		L1	L2	W	Min. LoopTensile Strength		packing
Black	Natural	mm	inch				lbs	kgs	
CTF-320BK	CTF-320	320	12 5/8"	40	278	7.6	120	55	100pcs



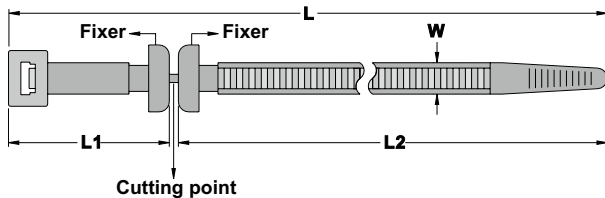


- Material: UL approved Nylon 66, 94V-2
- This simple, neat tie provides a permanent solution to the problem of fixing cables to cable trays. The one-piece all plastic moulding in tough, flexible Nylon 66, snaps apart to slot into cable trays.

CHASSIS TIE

Unit: mm

Part No.	L		W	Max.Bundle Dia.	packing
	mm	inch			
KFC-300BK	304	11 7/8"	6.2	85	100pcs
KFC-380BK	380	15"	7.6	100	
KFS-380BK	380	15"	7.6	100	




- Material: UL approved Nylon 66, 94V-2

MOUNTING ADJUSTABLE TIE

Unit: mm

Part No.	L		W	packing
	mm	inch		
MAT-120BK	120	4 3/4"	10	100pcs

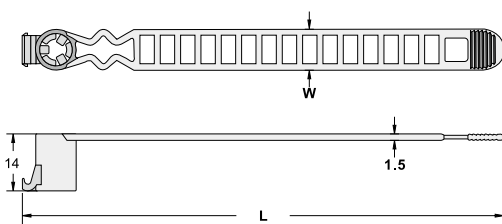


- Material: UL approved Nylon 66, 94V-2

MAGIC CABLE TIE

Unit: mm

Part No.	L		W	Max.Bundle Dia.	Color	packing
	mm	inch				
MGT-125	125	5"	12	30	BK WE RD YW BE GN	20pcs
MGT-135	135	5 5/16"	12	33		
MGT-150	150	6"	12	36		
MGT-150M	150	6"	10	36		
MGT-180	180	7"	12	40		
MGT-210	210	8 1/4"	16	50		
MGT-240	240	9 7/16"	16	65		
MGT-310	310	12"	16	85		



Part No.	W	Color	packing
MGTP-15	15	BK , WE , RD	10M/Roll
MGTP-20	20	YW , BE , GN	3M/Roll is available upon request





- Material: Hook Side: PP, Loop Side: Nylon
- Color: Black (BK), White (WE), Red (RD), Yellow (YW), Blue (BE), Green (GN)
- Application: Cord and cable management (UTP/STP/FIBER), wire harnesses, prevent interruption to transmission speed when using traditional Nylon cable ties. Reusable and easy to install.

NYLON CABLE TIE WITH STOPPER

Unit: mm

Part No.	L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
CVS-140	142	5 1/2"	3.2	20	40	18	100pcs
CVS-190	190	7 1/2"	4.8	45	50	22	
CVS-380XL	380	15"	12.7	105	250	114	


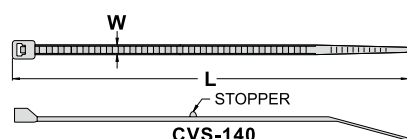


- Material: UL approved Nylon 66, 94V-2

COATED COPPER TUBE CABLE TIE

Unit: mm

Part No.	L		W	Max.Bundle Dia.	packing
	mm	inch			
AT-250	235	9 1/4"	20	65	100pcs
AT-290	275	10 13/16"	20	75	



- Material: Polyethylene PE.
- Color: Natural
- Function: Special for coated copper pipe in air conditioner

HOOK TIE

Unit: mm

Part No.	Cable Tie Length	Content	Color	packing
DP-2-A05NYW	150	Star	Yellow	2 pcs / Bag
DP-2-A06PK	150	Flower	Pink	
DP-2-A11NOE	150	Ribbon	Orange	
DP-2-A02NGN3	150	Clover	Green	

● Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation, not apt to age.

● Function: Using it in your kitchen, bathroom or bedroom, even on your stroller, convenient for bundling and hanging stuff.

● Feature:

1. Two-directions hook tie.
2. 360 degree rotatable hook fits any direction.
3. Releasable, reusable and environment friendly.
4. The load is up to 1.5Kgf proved by SGS laboratory.

※ Special color, length, design, package available on request.



PATENT



LUGGAGE TIE

Unit: mm

Part No.	L1		L2		W	packing
	mm	inch	mm	inch		
DP-2-DE1NGN3	150	6 "	200	8 "	4.8	2 pcs /Bag

● Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation, not apt to age.

● Color: Blue

● Function: By means of double lock, bind wires or restrict action immediately.


● Feature:

1. Bundling two things with single tie.
2. Smooth is inside so it won't hurt hands or wires.
3. Environmental friendly, wear and impact resistant, easy to carry.

※ Special color, length available on request.



PATENT

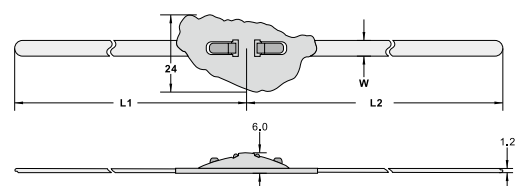

ROLLER BALL STAINLESS TIES

Unit: mm

Part No.		L		W	lbs	Max.Bundle Dia	Packing
Grade 316SS	Grade 304SS	mm	inch				
BST-127	BCT-127	127	5"	4.6	100	25	100 pcs
BST-152	BCT-152	152	6"	4.6	100	33	
BST-201	BCT-201	201	8"	4.6	100	51	
BST-266	BCT-266	266	10 1/2"	4.6	100	69	
BST-300	BCT-300	300	11 7/8"	4.6	100	80	
BST-362	BCT-362	362	14 1/4"	4.6	100	102	
BST-521	BCT-521	521	20 1/2"	4.6	100	152	
BST-679	BCT-679	679	26 3/4"	4.6	100	203	50 pcs
BST-838	BCT-838	838	33"	4.6	100	254	
BST-127L	BCT-127L	127	5"	7.9	250	25	100 pcs
BST-152L	BCT-152L	152	6"	7.9	250	33	
BST-201L	BCT-201L	201	8"	7.9	250	51	
BST-266L	BCT-266L	266	10 1/2"	7.9	250	69	
BST-300L	BCT-300L	300	11 7/8"	7.9	250	80	
BST-362L	BCT-362L	362	14 1/4"	7.9	250	102	
BST-521L	BCT-521L	521	20 1/2"	7.9	250	152	
BST-679L	BCT-679L	679	26 3/4"	7.9	250	203	50 pcs
BST-838L	BCT-838L	838	33"	7.9	250	254	


- Available In either 304 or 316 grade stainless steel.



- Material : Stainless Steel 316SS or 304SS

- Suit for engineering, aviation, ship area.

- Feature: Fast locking function, can be quick & easy installed. Designed for indoor and outdoor severe environmental conditions of high-humidity, high-temperature, and coldness in environmental conditions.



TG-21

STAINLESS STEEL TIE WITH COATING

Unit: mm

Part No.	L		W	lbs	Max.Bundle Dia	Packing
	mm	inch				
BSTC-127	127	5"	4.6	100	25	100 pcs
BSTC-152	152	6"	4.6	100	33	
BSTC-201	201	8"	4.6	100	51	
BSTC-266	266	10 1/2"	4.6	100	69	
BSTC-300	300	11 7/8"	4.6	100	80	
BSTC-362	362	14 1/4"	4.6	100	102	
BSTC-521	521	20 1/2"	4.6	100	152	
BSTC-679	679	26 3/4"	4.6	100	203	50 pcs
BSTC-838	838	33"	4.6	100	254	
BSTC-127L	127	5"	7.9	150	25	100 pcs
BSTC-152L	152	6"	7.9	150	33	
BSTC-201L	201	8"	7.9	150	51	
BSTC-266L	266	10 1/2"	7.9	150	69	
BSTC-300L	300	11 7/8"	7.9	150	80	
BSTC-362L	362	14 1/4"	7.9	150	102	
BSTC-521L	521	20 1/2"	7.9	150	152	
BSTC-679L	679	26 3/4"	7.9	150	203	50 pcs
BSTC-838L	838	33"	7.9	150	254	



- Material: Stainless Steel 316SS with Epoxy coating.

- Suit for engineering, aviation, ship area.

- Feature: Fast locking function, can be quick & easy installed. Special Epoxy coating to make stainless steel cable tie more insulation, anti-corrosion. Designed for indoor and outdoor severe environmental conditions of high-humidity, high-temperature, and coldness in environmental conditions.




LADDER TYPE STAINLESS STEEL TIE WITH COATING

Unit: mm

Part No.	L		W	Max.Bundle Dia	packing
	mm	inch			
ASTN-150	150	6"	7	35	100 pcs
ASTN-195	195	7 11/16"	7	49	
ASTN-225	225	9"	7	58	
ASTN-255	255	10"	7	68	
ASTN-300	300	11 7/8"	7	82	
ASTN-335	335	13 3/16"	7	93	
ASTN-375	375	14 3/4"	7	106	
ASTN-450	450	17 3/4"	7	130	
ASTN-610	610	24"	7	181	50 pcs
ASTN-150L	150	6"	12	35	
ASTN-195L	195	7 11/16"	12	49	
ASTN-225L	225	9"	12	58	
ASTN-255L	255	10"	12	68	
ASTN-300L	300	11 7/8"	12	82	
ASTN-335L	335	13 3/16"	12	93	
ASTN-375L	375	14 3/4"	12	106	
ASTN-450L	450	17 3/4"	12	130	
ASTN-610L	610	24"	12	181	



- Material: Stainless Steel 316SS with Nylon11 coating.
- Suit for engineering, aviation, ship area.
- Feature: Quick to fasten and adjustable length. Fast and easy application. Special Nylon11 coating to make stainless steel cable tie more abrasion resistance, weather resistance, impact resistance. Designed for indoor and outdoor severe environmental conditions of high-humidity, high-temperature, and coldness in environmental conditions.



STAINLESS STEEL TIE WITH COATING

Unit: mm

Part No.	L		W	Max.Bundle Dia	packing
	mm	inch			
RSTN-152	152	6"	6.3	35	50 pcs
RSTN-229	229	9"	6.3	60	
RSTN-305	305	12"	6.3	84	
RSTN-457	457	18"	6.3	132	
RSTN-610	610	24"	6.3	181	
RSTN-152L	152	6"	9.5	35	
RSTN-229L	229	9"	9.5	60	
RSTN-305L	305	12"	9.5	84	
RSTN-457L	457	18"	9.5	132	
RSTN-610L	610	24"	9.5	181	



- Material: Stainless Steel 316SS with Nylon11 coating.
- Suit for engineering, aviation, ship area.
- Feature: Quick to fasten and re-used. Fast and easy application. Special Nylon11 coating to make stainless steel cable tie more abrasion resistance, weather resistance, impact resistance. Designed for indoor and outdoor severe environmental conditions of high-humidity, high-temperature, and coldness in environmental conditions.

